

SAW Exhibit 17



542 (FINTEC)

FINTEC 542



- High capacity 12' x 5' (3.65m x 1.5m) on both screen decks
- Additional 5° screening angle inbuilt on bottom deck
- Up to 20% more screening area than most of our competitors
- Maximum screening efficiency
- Suitable for screening, recycling, demolition, quarrying, top soil, coal and many other products



- Capacité élevée sur les deux étages 12' x 5' (3.65m x 1.5m)
- L'étage inférieur bénéficie d'une pente accentuée de 5°
- Plus de 20% en plus de surface de criblage par rapport aux cribles de la concurrence
- Efficacité de criblage maximum
- Adapté pour le criblage en applications de recyclage, démolition, carrières de granulats, traitement des couches arables (terreux), charbon et bien d'autres produits



- Superficie vagliante di elevata capacità 12' x 5' (3.65m x 1.5m reali) su entrambi i piani vaglianti
- Incrementata la possibilità di inclinare il piano vagliante inferiore di ulteriori 5°
- Fino al 20% in più di area vagliante rispetto alla maggior parte della concorrenza
- Massima efficienza nella fase di vagliatura
- Adatto per la vagliatura nel riciclaggio, demolizione, cave, terreno sciolto, carbone e molti altri prodotti





- Alta capacidad en ambas mallas 12' x 5' (3.65m x 1.5m)
- Angulo de quebrado adicional de 5° en la malla inferior
- Hasta 20% más area de cribado que nuestros competidores
- Eficiencia de cribado máxima
- Idónea para cribado de materiales reciclados, materiales de demolición, cantera, carbón, tierra y muchos otros productos



- Hohe Siebleistung 12' x 5' (3.65m x 1.5m) auf beiden Siebdecks
- Zusätzliche 5° Siebneigung auf der ersten Hälfte des unteren Siebdecks
- Bis zu 20% größere Siebfläche als marktüblich
- Maximale Siebleistung
- Besonders geeignet für die Absiebung von Recycling-, Abbruch-, Steinbruch-, Abraum- und Kohlehaufwerk sowie viele andere Materialien



Machine Specification

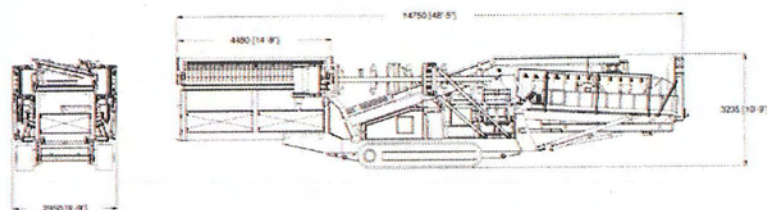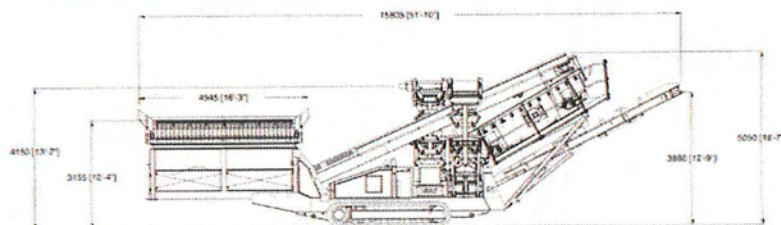

Screenbox Reject Grid

12ft x 5ft (3.65m x 1.5m)
12ft Remote Control Tipping with Bypass Chute (optional)
14ft Remote Control Tipping (standard)

Engine Type Engine Power Hopper Capacity Beltfeeder

CAT Water Cooled Diesel
74kw (99hp)
8m³ (10.4yd³)
1050mm Inclined 3 ply (42")
Variable Speed

Main Conveyor Side Conveyors

1050mm 3 ply (42")
650mm Chevron (26")
Variable Speed

Tail Conveyor Machine Weight Vibrating Grid Shredder

1200mm 3 ply (48")
26 Tonnes (29.12 US Tonnes)
12ft Double Deck
Single Shaft

